

Single Row Series : UC300


231


Bearing No.	Dimensions in mm				Basic Load Ratings		Wt. (Kg)
	d	D	B	C	N		
					Dynamic	Static	
UC305	25.000	62.000	38.000	20.000	17220	11930	0.350
UC306	30.000	72.000	43.000	23.000	20770	14170	0.560
UC307	35.000	80.000	48.000	25.000	25660	17920	0.710
UC308	40.000	90.000	52.000	27.000	31350	22380	0.960
UC309	45.000	100.000	57.000	30.000	40660	30000	1.280
UC310	50.000	110.000	61.000	32.000	47580	35710	1.650
UC311	55.000	120.000	66.000	34.000	55050	41910	2.070
UC312	60.000	130.000	71.000	36.000	62880	48600	2.600
UC313	65.000	140.000	75.000	38.000	72210	56680	3.250
UC314	70.000	150.000	78.000	40.000	80100	63480	3.890
UC315	75.000	160.000	82.000	42.000	87250	71670	4.720
UC316	80.000	170.000	86.000	44.000	94570	80350	5.550
UC317	85.000	180.000	96.000	46.000	102050	89520	6.670
UC318	90.000	190.000	96.000	48.000	110810	100760	7.560
UC319	95.000	200.000	103.000	50.000	120510	103750	8.700

Ball Bearings

BU

Bearing No.	Dimensions in mm					Basic Load Ratings		Wt. (Kg)
	d	D	B ₁	B	C	N		
						Dynamic	Static	
AEL201	12.000	40.000	28.600	19.100	12.000	7360	4480	0.120
AEL202	15.000	40.000	28.600	19.100	12.000	7360	4480	0.100
AEL203	17.000	40.000	28.600	19.100	12.000	7360	4480	0.090
AEL204	20.000	47.000	31.000	21.500	14.000	9880	6200	0.160
AEL205	25.000	52.000	31.000	21.500	15.000	10780	6980	0.200
AEL206	30.000	62.000	35.700	23.800	16.000	14970	10040	0.300
AEL207	35.000	72.000	38.900	25.400	17.000	19750	13670	0.420
AEL208	40.000	80.000	43.700	30.200	18.000	22710	15940	0.600
AEL209	45.000	85.000	43.700	30.200	19.000	24360	17710	0.760
AEL210	50.000	90.000	43.700	30.200	20.000	26980	19840	0.910
AEL211	55.000	100.000	48.400	32.500	21.000	33370	25110	1.260
AEL212	60.000	110.000	53.100	37.200	22.000	36740	27970	1.700

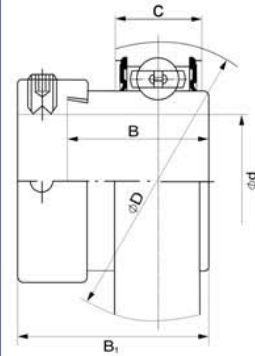KG



Single Row Series : UCP200


233

Bearing No.	Shaft Dia in mm	Dimensions in mm			Wt. (Kg)
		h	a	e	
UCP201	12.000	30.200	127.000	95.000	0.650
UCP202	15.000	30.200	127.000	95.000	0.630
UCP203	17.000	30.200	127.000	95.000	0.620
UCP204	20.000	33.300	127.000	95.000	0.650
UCP205	25.000	36.500	140.000	105.000	0.790
UCP206	30.000	42.900	165.000	121.000	1.300
UCP207	35.000	47.600	167.000	127.000	1.600
UCP208	40.000	49.200	184.000	137.000	2.000
UCP209	45.000	54.000	190.000	146.000	2.300
UCP210	50.000	57.200	206.000	159.000	2.700
UCP211	55.000	63.500	219.000	171.000	3.300
UCP212	60.000	69.800	241.000	184.000	4.700
UCP213	65.000	76.200	265.000	203.000	5.600
UCP214	70.000	79.400	266.000	210.000	7.300
UCP215	75.000	82.600	275.000	217.000	7.900
UCP216	80.000	88.900	292.000	232.000	10.000
UCP217	85.000	95.200	310.000	247.000	12.200
UCP218	90.000	101.600	327.000	262.000	14.700

Pillow Block Units

BU


Bearing No.	Shaft Dia in mm	Dimensions in mm			Wt. (Kg)
		h	a	e	
UCP305	25.000	45.000	175.000	132.000	1.600
UCP306	30.000	50.000	180.000	140.000	1.900
UCP307	35.000	56.000	210.000	160.000	2.700
UCP308	40.000	60.000	220.000	170.000	3.300
UCP309	45.000	67.000	245.000	190.000	4.500
UCP310	50.000	75.000	275.000	212.000	6.200
UCP311	55.000	80.000	310.000	236.000	7.700
UCP312	60.000	85.000	330.000	250.000	9.300
UCP313	65.000	90.000	340.000	260.000	9.800
UCP314	70.000	95.000	360.000	280.000	11.400
UCP315	75.000	100.000	380.000	290.000	13.600
UCP316	80.000	106.000	400.000	300.000	16.400
UCP317	85.000	112.000	420.000	320.000	18.600
UCP318	90.000	118.000	430.000	330.000	20.900
UCP319	95.000	125.000	470.000	360.000	26.500
UCP320	100.000	140.000	490.000	380.000	34.300

KG



Series : **UCPA200**

235

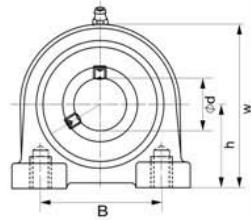


b: Inner Ring Width of Bearing


Bearing No.	Dimensions in mm					Wt. (Kg)
	d	h	b	w	B	
UCPA201	12.000	30.200	40.000	62.000	31.000	0.600
UCPA202	15.000	30.200	40.000	62.000	31.000	0.590
UCPA203	17.000	30.200	40.000	62.000	31.000	0.580
UCPA204	20.000	30.200	40.000	62.000	31.000	0.560
UCPA205	25.000	36.500	38.000	72.000	34.100	0.830
UCPA206	30.000	42.900	50.000	84.000	38.100	1.120
UCPA207	35.000	47.600	55.000	95.000	42.900	1.480
UCPA208	40.000	49.200	58.000	100.000	49.200	1.890
UCPA209	45.000	54.200	60.000	108.000	49.200	1.980
UCPA210	50.000	57.200	64.000	116.000	51.600	2.160
UCPA211	55.000	63.500	66.000	125.000	55.600	3.260
UCPA212	60.000	69.900	68.000	138.000	65.100	4.190

Pillow Block Units

BU

Bearing No.	Shaft Dia in mm	Dimensions in mm		Wt. (Kg)
		a	e	
UCF201	12.000	86.000	64.000	0.640
UCF202	15.000	86.000	64.000	0.620
UCF203	17.000	86.000	64.000	0.610
UCF204	20.000	86.000	64.000	0.590
UCF205	25.000	95.000	70.000	0.820
UCF206	30.000	108.000	83.000	1.100
UCF207	35.000	117.000	92.000	1.500
UCF208	40.000	130.000	102.000	2.000
UCF209	45.000	137.000	105.000	2.400
UCF210	50.000	143.000	111.000	2.500
UCF211	55.000	162.000	130.000	3.400
UCF212	60.000	175.000	143.000	4.600
UCF213	65.000	187.000	149.000	5.500
UCF214	70.000	193.000	152.000	6.100
UCF215	75.000	200.000	159.000	6.900
UCF216	80.000	208.000	165.000	7.800
UCF217	85.000	220.000	175.000	9.300
UCF218	90.000	235.000	187.000	11.300

KG



Series : UCF300


237


Bearing No.	Shaft Dia in mm	Dimensions in mm		Wt. (Kg)
		a	e	
UCF305	25.000	110.000	80.000	1.200
UCF306	30.000	125.000	95.000	1.700
UCF307	35.000	135.000	100.000	2.100
UCF308	40.000	150.000	112.000	2.900
UCF309	45.000	160.000	125.000	3.600
UCF310	50.000	175.000	132.000	4.700
UCF311	55.000	185.000	140.000	5.700
UCF312	60.000	195.000	150.000	6.800
UCF313	65.000	208.000	166.000	7.800
UCF314	70.000	226.000	178.000	9.600
UCF315	75.000	236.000	184.000	11.700
UCF316	80.000	250.000	196.000	13.700
UCF317	85.000	260.000	204.000	15.200
UCF318	90.000	280.000	216.000	18.800
UCF319	95.000	290.000	228.000	20.700
UCF320	100.000	310.000	242.000	24.800

Square Flange Units

BU

Bearing No.	Dimensions in mm					Wt. (Kg)
	d	a	p	e	B	
UCFC201	12.000	100.000	78.000	55.100	31.000	0.730
UCFC202	15.000	100.000	78.000	55.100	31.000	0.720
UCFC203	17.000	100.000	78.000	55.100	31.000	0.710
UCFC204	20.000	100.000	78.000	55.100	31.000	0.690
UCFC205	25.000	115.000	90.000	63.600	34.100	1.000
UCFC206	30.000	125.000	100.000	70.700	38.100	1.300
UCFC207	35.000	135.000	110.000	77.800	42.900	1.810
UCFC208	40.000	145.000	120.000	84.800	49.200	2.140
UCFC209	45.000	160.000	132.000	93.300	49.200	2.680
UCFC210	50.000	165.000	138.000	97.600	51.600	2.900
UCFC211	55.000	185.000	150.000	106.100	55.600	4.010
UCFC212	60.000	195.000	160.000	113.100	65.100	4.940
UCFC213	65.000	205.000	170.000	120.200	65.100	5.650
UCFC214	70.000	215.000	177.000	125.100	74.600	6.950
UCFC215	75.000	220.000	184.000	130.100	77.800	7.560
UCFC216	80.000	240.000	200.000	141.400	82.600	9.150
UCFC217	85.000	250.000	208.000	147.100	85.700	10.810
UCFC218	90.000	265.000	220.000	155.500	96.000	12.960





Series : UCFL200

239

Bearing No.	Shaft Dia in mm	Dimensions in mm			Wt. (Kg)
		a	e	b	
UCFL201	12.000	113.000	90.000	60.000	0.500
UCFL202	15.000	113.000	90.000	60.000	0.480
UCFL203	17.000	113.000	90.000	60.000	0.470
UCFL204	20.000	113.000	90.000	60.000	0.450
UCFL205	25.000	130.000	99.000	68.000	0.630
UCFL206	30.000	148.000	117.000	80.000	0.960
UCFL207	35.000	161.000	130.000	90.000	1.200
UCFL208	40.000	175.000	144.000	100.000	1.600
UCFL209	45.000	188.000	148.000	108.000	1.900
UCFL210	50.000	197.000	157.000	115.000	2.200
UCFL211	55.000	224.000	184.000	130.000	3.200
UCFL212	60.000	250.000	202.000	140.000	4.100
UCFL213	65.000	258.000	210.000	155.000	5.100
UCFL214	70.000	265.000	216.000	160.000	6.000
UCFL215	75.000	275.000	225.000	165.000	6.500
UCFL216	80.000	290.000	233.000	180.000	8.000
UCFL217	85.000	305.000	248.000	190.000	9.500
UCFL218	90.000	320.000	265.000	205.000	11.900

230


Single Row Series: **UC200**

Ball Bearings


BU


Bearing No.	Dimensions in mm				Basic Load Ratings		Wt. (Kg)
	d	D	B	C	N		
					Dynamic	Static	
UC201	12.000	47.000	31.000	17.000	9880	6200	0.200
UC202	15.000	47.000	31.000	17.000	9880	6200	0.190
UC203	17.000	47.000	31.000	17.000	9880	6200	0.180
UC204	20.000	47.000	31.000	17.000	9880	6200	0.160
UC205	25.000	52.000	34.100	17.000	10780	6980	0.200
UC206	30.000	62.000	38.100	19.000	14970	10040	0.320
UC207	35.000	72.000	42.900	20.000	19750	13670	0.480
UC208	40.000	80.000	49.200	21.000	22710	15940	0.640
UC209	45.000	85.000	49.200	22.000	24360	17710	0.680
UC210	50.000	90.000	51.600	24.000	26980	19840	0.800
UC211	55.000	100.000	55.600	25.000	33370	25110	1.110
UC212	60.000	110.000	65.100	27.000	36740	27970	1.540
UC213	65.000	120.000	65.100	28.000	44010	34180	1.850
UC214	70.000	125.000	74.600	29.000	46790	37590	2.050
UC215	75.000	130.000	77.800	30.000	50850	41260	2.210
UC216	80.000	140.000	82.600	32.000	55040	45090	2.800
UC217	85.000	150.000	85.700	34.000	64010	53280	3.460
UC218	90.000	160.000	96.000	36.000	73830	60760	4.360

KG®



Bearing No.	Shaft Dia in mm	Dimensions in mm			WL (Kg)
		a	e	b	
UCFL305	25.000	150.000	113.000	80.000	1.100
UCFL306	30.000	180.000	134.000	90.000	1.500
UCFL307	35.000	185.000	141.000	100.000	1.800
UCFL308	40.000	200.000	158.000	112.000	2.400
UCFL309	45.000	230.000	177.000	125.000	3.400
UCFL310	50.000	240.000	187.000	140.000	4.300
UCFL311	55.000	250.000	198.000	150.000	5.100
UCFL312	60.000	270.000	212.000	160.000	6.200
UCFL313	65.000	295.000	240.000	175.000	7.400
UCFL314	70.000	315.000	250.000	185.000	9.000
UCFL315	75.000	320.000	260.000	195.000	10.000
UCFL316	80.000	355.000	285.000	210.000	12.600
UCFL317	85.000	370.000	300.000	220.000	14.500
UCFL318	90.000	385.000	315.000	235.000	17.100
UCFL319	95.000	405.000	330.000	250.000	21.800
UCFL320	100.000	440.000	360.000	270.000	26.500

KG



Series : **UCT200**


Bearing No.	Shaft Dia in mm	Dimensions in mm			Wt. (Kg)
		a	w	h	
UCT201	12.000	89.000	94.000	61.000	0.790
UCT202	15.000	89.000	94.000	61.000	0.770
UCT203	17.000	89.000	94.000	61.000	0.760
UCT204	20.000	89.000	94.000	61.000	0.740
UCT205	25.000	89.000	97.000	62.000	0.820
UCT206	30.000	102.000	113.000	70.000	1.300
UCT207	35.000	102.000	129.000	78.000	1.600
UCT208	40.000	114.000	144.000	88.000	2.400
UCT209	45.000	117.000	144.000	87.000	2.400
UCT210	50.000	117.000	149.000	90.000	2.500
UCT211	55.000	146.000	171.000	106.000	4.000
UCT212	60.000	146.000	194.000	119.000	5.100
UCT213	65.000	167.000	224.000	137.000	7.000
UCT214	70.000	167.000	224.000	137.000	7.100
UCT215	75.000	167.000	232.000	140.000	7.500
UCT216	80.000	184.000	235.000	140.000	8.500
UCT217	85.000	198.000	260.000	162.000	11.200


241

Take-up Units

BU

Bearing No.	Shaft Dia in mm	Dimensions in mm			Wt. (Kg)
		a	w	h	
UCT305	25.000	89.000	122.000	76.000	1.400
UCT306	30.000	100.000	137.000	85.000	1.800
UCT307	35.000	111.000	150.000	94.000	2.400
UCT308	40.000	124.000	162.000	100.000	3.000
UCT309	45.000	138.000	178.000	110.000	4.100
UCT310	50.000	151.000	191.000	117.000	5.200
UCT311	55.000	163.000	207.000	127.000	6.400
UCT312	60.000	178.000	220.000	135.000	7.600
UCT313	65.000	190.000	238.000	146.000	9.200
UCT314	70.000	202.000	252.000	155.000	11.200
UCT315	75.000	216.000	262.000	160.000	13.000
UCT316	80.000	230.000	282.000	174.000	15.600
UCT317	85.000	240.000	298.000	183.000	19.300
UCT318	90.000	255.000	312.000	192.000	21.200
UCT319	95.000	270.000	322.000	197.000	24.400
UCT320	100.000	290.000	345.000	210.000	30.600

KG



Series : UC200


243


Bearing No.	Dimensions in inch				Basic Load Ratings		Wt. (Kg)
	d	D	B	C	N		
					Dynamic	Static	
UC201-8	3/4	1.850	1.220	0.669	9880	6200	0.190
UC202-9	9/16	1.850	1.220	0.669	9880	6200	0.190
UC202-10	5/8	1.850	1.220	0.669	9880	6200	0.190
UC203-11	11/16	1.850	1.220	0.669	9880	6200	0.170
UC204-12	3/4	1.850	1.220	0.669	9880	6200	0.160
UC205-13	13/16	2.004	1.342	0.669	10780	6980	0.240
UC205-14	7/8	2.004	1.342	0.669	10780	6980	0.230
UC205-15	15/16	2.004	1.342	0.669	10780	6980	0.210
UC205-16	1	2.004	1.342	0.669	10780	6980	0.200
UC206-17	1-1/16	2.440	1.500	0.748	14970	10040	0.330
UC206-18	1-1/8	2.440	1.500	0.748	14970	10040	0.340
UC206-19	1-3/16	2.440	1.500	0.748	14970	10040	0.320
UC206-20	1-1/4	2.440	1.500	0.748	14970	10040	0.310
UC207-20	1-1/4	2.834	1.689	0.787	19750	13670	0.540
UC207-21	1-5/16	2.834	1.689	0.787	19750	13670	0.510
UC207-22	1-3/8	2.834	1.689	0.787	19750	13670	0.480
UC207-23	1-7/16	2.834	1.689	0.787	19750	13670	0.450
UC208-24	1-1/12	3.149	1.937	0.826	22710	15940	0.680
UC208-25	1-9/16	3.149	1.937	0.826	22710	15940	0.650
UC209-26	1-5/8	3.346	1.937	0.866	24360	17710	0.780
UC209-27	1-11/16	3.346	1.937	0.866	24360	17710	0.740
UC209-28	1-3/4	3.346	1.937	0.866	24360	17710	0.700
UC210-29	1-13/16	3.543	2.031	0.944	26980	19840	0.920
UC210-30	1-7/8	3.543	2.031	0.944	26980	19840	0.870
UC210-31	1-15/16	3.543	2.031	0.944	26980	19840	0.820
UC210-32	2	3.543	2.031	0.944	26980	19840	0.780
UC211-32	2	3.937	2.189	0.984	33370	25110	1.260
UC211-33	2-1/16	3.937	2.189	0.984	33370	25110	1.200

Ball Bearings

BU

Bearing No.	Dimensions in inch				Basic Load Ratings		Wt. (Kg)
	d	D	B	C	N		
					Dynamic	Static	
UC211-34	2-1/8	3.937	2.189	0.984	33370	25110	1.150
UC211-35	2-3/16	3.937	2.189	0.984	33370	25110	1.090
UC212-36	2-1/4	4.330	2.563	1.063	36740	27970	1.670
UC212-37	2-5/16	4.330	2.563	1.063	36740	27970	1.590
UC212-38	2-3/8	4.330	2.563	1.063	36740	27970	1.520
UC212-39	2-7/16	4.330	2.563	1.063	36740	27970	1.450
UC213-40	2-1/2	4.330	2.563	1.102	44010	34180	1.940
UC213-41	2-9/16	4.330	2.563	1.102	44010	34180	1.850
UC214-42	2-5/8	4.921	2.937	1.142	46790	37590	2.260
UC214-43	2-11/16	4.921	2.937	1.142	46790	37590	2.160
UC214-44	2-3/4	4.921	2.937	1.142	46790	37590	2.060
UC215-45	2-13/16	5.118	3.063	1.181	50850	41260	2.460
UC215-46	2-7/8	5.118	3.063	1.181	50850	41260	2.350
UC215-47	2-15/16	5.118	3.063	1.181	50850	41260	2.240
UC215-48	3	5.118	3.063	1.181	50850	41260	2.120
UC216-49	3-1/16	5.511	3.252	1.260	55040	45090	2.980
UC216-50	3-1/8	5.511	3.252	1.260	55040	45090	2.850
UC216-51	3-3/16	5.511	3.252	1.260	55040	45090	2.720
UC217-52	3-1/4	5.905	3.374	1.339	64010	53280	3.680
UC217-53	3-5/16	5.905	3.374	1.339	64010	53280	3.540
UC217-55	3-7/16	5.905	3.374	1.339	64010	53280	3.250
UC218-56	3-1/2	6.299	3.779	1.417	73830	60760	4.470

KG



Series : UC300


245


Bearing No.	Dimensions in inch				Basic Load Ratings		Wt. (Kg)
	d	D	B	C	N		
					Dynamic	Static	
UC305-13	13/16	2.440	1.496	0.787	17220	11930	0.400
UC305-14	7/8	2.440	1.496	0.787	17220	11930	0.380
UC305-15	15/16	2.440	1.496	0.787	17220	11930	0.360
UC305-16	1	2.440	1.496	0.787	17220	11930	0.350
UC306-17	1-1/16	2.834	1.692	0.905	20770	14170	0.610
UC306-18	1-1/8	2.834	1.692	0.905	20770	14170	0.580
UC306-19	1-3/16	2.834	1.692	0.905	20770	14170	0.560
UC307-20	1-1/4	3.149	1.889	0.984	25660	17920	0.770
UC307-21	1-5/16	3.149	1.889	0.984	25660	17920	0.740
UC307-22	1-3/8	3.149	1.889	0.984	25660	17920	0.710
UC307-23	1-7/16	3.149	1.889	0.984	25660	17920	0.680
UC308-24	1-1/2	3.543	2.047	1.063	31350	22380	1.010
UC308-25	1-9/16	3.543	2.047	1.063	31350	22380	0.970
UC309-26	1-5/8	3.937	2.244	1.181	40660	30000	1.390
UC309-27	1-11/16	3.937	2.244	1.181	40660	30000	1.350
UC309-28	1-3/4	3.937	2.244	1.181	40660	30000	1.300
UC310-29	1-13/16	4.330	2.401	1.259	47580	35710	1.970
UC310-30	1-7/8	4.330	2.401	1.259	47580	35710	1.740
UC310-31	1-15/16	4.330	2.401	1.259	47580	35710	1.680
UC311-32	2	4.724	2.598	1.338	55050	41910	2.250
UC311-33	2-1/16	4.724	2.598	1.338	55050	41910	2.180
UC311-34	2-1/8	4.724	2.598	1.338	55050	41910	2.120
UC311-35	2-3/16	4.724	2.598	1.338	55050	41910	2.040
UC312-36	2-1/4	5.118	2.795	1.417	62880	48600	2.750
UC312-37	2-5/16	5.118	2.795	1.417	62880	48600	2.670
UC312-38	2-3/8	5.118	2.795	1.417	62880	48600	2.580
UC312-39	2-7/16	5.118	2.795	1.417	62880	48600	2.500
UC313-40	2-1/2	5.511	2.952	1.496	72210	56680	3.340

Ball Bearings

BU

Bearing No.	Dimensions in inch				Basic Load Ratings		Wt. (Kg)
	d	D	B	C	N		
					Dynamic	Static	
UC313-41	2-9/16	5.511	2.953	1.496	72210	56680	3.240
UC314-42	2-5/8	5.905	3.071	1.574	80100	63480	4.110
UC314-43	2-11/16	5.905	3.071	1.574	80100	63480	4.000
UC314-44	2-3/4	5.905	3.071	1.574	80100	63480	3.900
UC315-45	2-13/16	6.299	3.228	1.653	87250	71670	4.990
UC315-46	3-7/8	6.299	3.228	1.653	87250	71670	4.850
UC315-47	2-15/16	6.299	3.228	1.653	87250	71670	4.760
UC315-48	3	6.299	3.228	1.653	87250	71670	4.630
UC316-49	3-1/16	6.692	3.386	1.732	94570	80350	5.720
UC316-50	3-1/8	6.692	3.386	1.732	94570	80350	5.580
UC316-51	3-3/16	6.692	3.386	1.732	94570	80350	5.490
UC317-52	3-1/4	7.086	3.779	1.811	102050	89520	6.890
UC317-53	3-5/16	7.086	3.779	1.811	102050	89520	6.760
UC317-55	3-7/16	7.086	3.779	1.811	102050	89520	6.440
UC318-55	3-7/16	7.480	3.779	1.889	110810	100760	7.850
UC318-56	3-1/2	7.480	3.779	1.889	110810	100760	7.670
UC319-58	3-5/8	7.874	4.055	1.968	120510	103750	9.030
UC319-59	3-11/16	7.874	4.055	1.968	120510	103750	8.850
UC319-60	3-3/4	7.874	4.055	1.968	120510	103750	8.660

KG

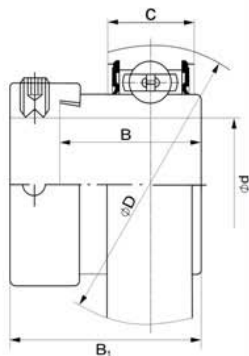

Series : AEL200


247


Bearing No.	Dimensions in inch					Basic Load Ratings		Wt. (Kg)
	d	D	B ₁	B	C	N		
						Dynamic	Static	
AEL201-8	3/4	1.574	1.126	0.752	0.472	7360	4480	0.120
AEL209-9	9/16	1.574	1.126	0.752	0.472	7360	4480	0.100
AEL209-10	5/8	1.574	1.126	0.752	0.472	7360	4480	1.100
AEL203-11	11/16	1.574	1.126	0.752	0.472	7360	4480	0.100
AEL204-12	3/4	1.850	1.220	0.846	0.551	9980	6200	0.160
AEL205-13	13/16	2.047	1.220	0.846	0.590	10780	6980	0.220
AEL205-14	7/8	2.047	1.220	0.846	0.590	10780	6980	0.210
AEL205-15	15/16	2.047	1.220	0.846	0.590	10780	6980	0.210
AEL205-16	1	2.047	1.220	0.846	0.590	10780	6980	0.200
AEL206-17	1-1/16	2.440	1.406	0.937	0.629	14970	10040	0.320
AEL206-18	1-1/8	2.440	1.406	0.937	0.629	14970	10040	0.310
AEL206-19	1-3/16	2.440	1.406	0.937	0.629	14970	10040	0.300
AEL206-20	1-1/4	2.440	1.406	0.937	0.629	14970	10040	0.290
AEL207-20	1-1/4	2.834	1.531	1.000	0.669	19750	13670	0.460
AEL207-21	1-5/16	2.834	1.531	1.000	0.669	19750	13670	0.430
AEL207-22	1-3/8	2.834	1.531	1.000	0.669	19750	13670	0.420
AEL207-23	1-7/16	2.834	1.531	1.000	0.669	19750	13670	0.410
AEL208-24	1-1/2	3.149	1.721	1.189	0.708	22710	15940	0.580
AEL208-25	1-9/16	3.149	1.721	1.189	0.708	22710	15940	0.600
AEL209-26	1-5/8	3.346	1.721	1.189	0.748	24360	17710	0.760
AEL209-27	1-11/16	3.346	1.721	1.189	0.748	24360	17710	0.760
AEL209-28	1-3/4	3.346	1.721	1.189	0.748	24360	17710	0.760
AEL210-29	1-13/16	3.543	1.721	1.189	0.787	26980	19840	0.910
AEL210-30	1-7/8	3.543	1.721	1.189	0.787	26980	19840	0.910
AEL210-31	1-15/16	3.543	1.721	1.189	0.787	26980	19840	0.910
AEL210-32	2	3.543	1.721	1.189	0.787	26980	19840	0.910
AEL211-32	2	3.937	1.906	1.279	0.826	33370	25110	1.260
AEL211-33	2-1/16	3.937	1.906	1.279	0.826	33370	25110	1.260
AEL211-34	2-1/8	3.937	1.906	1.279	0.826	33370	25110	1.260
AEL211-35	2-3/16	3.937	1.906	1.279	0.826	33370	25110	1.260
AEL212-36	2-1/4	4.330	2.091	1.464	0.866	36740	27970	1.700
AEL212-37	2-5/16	4.330	2.091	1.464	0.866	36740	27970	1.700
AEL212-38	2-3/8	4.330	2.091	1.464	0.866	36740	27970	1.700
AEL212-39	2-7/16	4.330	2.091	1.464	0.866	36740	27970	1.700

Ball Bearings

BU

Bearing No.	Shaft Dia in inch	Dimensions in inch			Wt. (Kg)
		h	a	e	
UCP201-8	1/2	1-3/8	5	3-3/4	0.610
UCP202-9	9/16	1-3/8	5	3-3/4	0.610
UCP202-10	5/8	1-3/8	5	3-3/4	0.610
UCP203-11	11/16	1-3/8	5	3-3/4	0.610
UCP204-12	3/4	1-5/16	5	3-3/4	0.660
UCP205-14	7/8	1-7/16	5-1/2	4-1/8	0.800
UCP205-15	15/16	1-7/16	5-1/2	4-1/8	0.800
UCP205-16	1	1-7/16	5-1/2	4-1/8	0.800
UCP206-17	1-1/16	1-11/16			
UCP206-18	1-1/8	1-11/16	6-1/2	4-3/4	1.300
UCP206-19	1-3/16	1-11/16	6-1/2	4-3/4	1.300
			6-1/2	4-3/4	1.300
UCP207-20	1-1/4	1-7/8	6-9/16	5	1.600
UCP207-21	1-5/16	1-7/8	6-9/16	5	1.600
UCP207-22	1-3/8	1-7/8	6-9/16	5	1.600
UCP207-23	1-7/16	1-7/8	6-9/16	5	1.600
UCP208-24	1-1/2	1-15/16	7-1/4	5-3/8	2.000
UCP208-25	1-9/16	1-15/16	7-1/4	5-3/8	2.000
UCP208-26	1-5/8	2-1/8	7-1/2	5-3/4	2.200
UCP209-27	1-11/16	2-1/8	7-1/2	5-3/4	2.200
UCP209-28	1-3/4	2-1/8	7-1/2	5-3/4	2.200
UCP210-30	1-7/8	2-1/4	8-1/8	6-1/4	2.900
UCP210-31	1-15/16	2-1/4	8-1/8	6-1/4	2.900
UCP211-32	2	2-1/2	8-5/8	6-3/4	3.600
UCP211-34	2-1/8	2-1/2	8-5/8	6-3/4	3.600
UCP211-35	2-3/16	2-1/2	8-5/8	6-3/4	3.600
UCP212-36	2-1/4	2-3/4	9-1/2	7-1/4	4.900
UCP212-38	2-3/8	2-3/4	9-1/2	7-1/4	4.900
UCP212-39	2-3/8	2-3/4	9-1/2	7-1/4	4.900
UCP213-40	2-1/2	3	10-7/16	8	5.900
UCP214-44	2-3/4	3-1/8	10-1/2	8-1/4	6.800
UCP215-48	3	3-1/4	10-11/16	8-1/2	7.400

KG



Series : **UCP300**


249

Pillow Block Units


BU

Bearing No.	Shaft Dia in inch	Dimensions in inch			Wt. (Kg)
		h	a	e	
UCP305-14	7/8	1-49/64	6-7/8	5-1/4	1.600
UCP305-16	1	1-49/64	6-7/8	5-1/4	1.600
UCP306-18	1-1/8	1-31/32	7-1/6	5-1/2	1.900
UCP307-20	1-1/4	2-13/64	8-1/4	6-1/4	2.700
UCP307-22	1-3/8	2-13/64	8-1/4	6-1/4	2.700
UCP308-24	1-1/2	2-23/64	8-11/16	6-3/4	3.300
UCP309-26	1-5/8	2-41/64	9-5/8	7-1/2	4.500
UCP309-28	1-3/4	2-41/64	9-5/8	7-1/2	4.500
UCP310-30	1-7/8	2-61/64	10-13/16	8-3/8	6.200
UCP311-32	2	3-5/32	12-3/16	9-1/4	7.700
UCP311-34	2-1/8	3-5/32	12-3/16	9-1/4	7.700
UCP312-36	2-1/4	3-11/32	13	9-7/8	9.300
UCP312-38	2-3/8	3-11/32	13	9-7/8	9.300
UCP313-40	2-1/2	3-35/64	13-3/8	10-1/4	9.800
UCP314-44	2-3/4	3-47/64	14-3/16	11	11.400
UCP315-48	3	3-15/16	15	11-3/8	13.600
UCP316-50	3-1/8	4-11/64	15-3/4	11-3/4	16.400
UCP317-52	3-1/4	4-13/32	16-9/16	12-5/8	18.000
UCP318-56	3-1/2	4-41/64	16-15/16	13	20.900
UCP319-60	3-3/4	4-59/64	18-1/2	14-1/8	26.500
UCP320-64	4	5-33/64	19-5/16	15	34.300

Bearing No.	Dimensions in inch					Wt. (Kg)
	d	h	b	w	B	
UCPA201-8	3/4	1-3/16	1-9/16	2-7/16	1.220	0.590
UCPA202-9	9/16	1-3/16	1-9/16	2-7/16	1.220	0.590
UCPA202-10	5/8	1-3/16	1-9/16	2-7/16	1.220	0.590
UCPA203-11	11/16	1-3/16	1-9/16	2-7/16	1.220	0.570
UCPA204-12	3/4	1-3/16	1-9/16	2-7/16	1.220	0.560
UCPA205-13	13/16	1-7/16	1-1/2	2-53/64	1.342	0.870
UCPA205-14	7/8	1-7/16	1-1/2	2-53/64	1.342	0.860
UCPA205-15	15/16	1-7/16	1-1/2	2-53/64	1.342	0.840
UCPA205-16	1	1-7/16	1-1/2	2-53/64	1.342	0.830
UCPA206-17	1-1/16	1-1/16	1-31/32	3-5/16	1.500	1.150
UCPA206-18	1-1/8	1-1/16	1-31/32	3-5/16	1.500	1.140
UCPA206-19	1-3/16	1-1/16	1-31/32	3-5/16	1.500	1.120
UCPA206-20	1-1/4	1-1/16	1-31/32	3-5/16	1.500	1.110
UCPA207-20	1-1/4	1-7/8	2-11/64	3-47/64	1.689	1.540
UCPA207-21	1-5/16	1-7/8	2-11/64	3-47/64	1.689	1.510
UCPA207-22	1-3/8	1-7/8	2-11/64	3-47/64	1.689	1.480
UCPA207-23	1-7/16	1-7/8	2-11/64	3-47/64	1.689	1.450
UCPA208-24	1-1/2	1-15/16	2-9/32	3-15/16	1.937	1.930
UCPA208-25	1-9/16	1-5/16	2-9/32	3-15/16	1.937	1.900
UCPA209-26	1-5/8	2-9/64	2-23/64	4-1/4	1.937	2.080
UCPA209-27	1-11/16	2-9/64	2-23/64	4-1/4	1.937	2.040
UCPA209-28	1-3/4	2-9/64	2-23/64	4-1/4	1.937	2.000
UCPA210-29	1-3/16	2-1/4	2-33/64	4-9/16	2.031	2.280
UCPA210-30	1-7/8	2-1/4	2-33/64	4-9/16	2.031	2.230
UCPA210-31	1-15/16	2-1/4	2-33/64	4-9/16	2.031	2.180
UCPA210-32	2	2-1/4	2-33/64	4-9/16	2.031	2.140
UCPA211-32	2	2-1/2	2-19/32	4-59/64	2.189	3.410
UCPA211-33	2-1/16	2-1/2	2-19/32	4-59/64	2.189	3.350
UCPA211-34	2-1/8	2-1/2	2-19/32	4-59/64	2.189	3.300
UCPA211-35	2-3/16	2-1/2	2-19/32	4-59/64	2.189	3.240
UCPA212-36	2-1/4	2-3/4	2-43/64	5-7/16	2.563	4.320
UCPA212-37	2-5/16	2-3/4	2-43/64	5-7/16	2.563	4.240
UCPA212-38	2-3/8	2-3/4	2-43/64	5-7/16	2.563	4.170
UCPA212-39	2-7/16	2-3/4	2-43/64	5-7/16	2.563	4.100

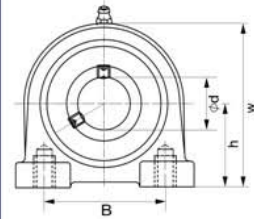

b: Inner Ring Width of Bearing



Series : UCF200


251


Bearing No.	Shaft Dia in inch	Dimensions in inch		Wt. (Kg)
		a	e	
UCF201-8	1/2	3-3/8	2-1/2	0.620
UCF202-9	9/16	3-3/8	2-1/2	0.620
UCF202-10	5/8	3-3/8	2-1/2	0.620
UCF203-11	11/16	3-3/8	2-1/2	0.620
UCF204-12	3/4	3-3/8	2-1/2	0.620
UCF205-14	7/8	3-3/4	2-3/4	0.830
UCF205-15	15/16	3-3/4	2-3/4	0.830
UCF205-16	1	3-3/4	2-3/4	0.830
UCF206-17	1-1/16	4-1/4	3-1/4	1.100
UCF206-18	1-1/8	4-1/4	3-1/4	1.100
UCF206-19	1-3/16	4-1/4	3-1/4	1.100
UCF207-20	1-1/4	4-5/8	3-5/8	1.500
UCF207-21	1-5/16	4-5/8	3-5/8	1.500
UCF207-22	1-3/8	4-5/8	3-5/8	1.500
UCF207-23	1-7/16	4-5/8	3-5/8	1.500
UCF208-24	1-1/2	5-1/8	4	1.900
UCF208-25	1-9/16	5-1/8	4	1.900
UCF209-26	1-5/8	5-3/8	4-1/8	2.200
UCF209-27	1-11/16	5-3/8	4-1/8	2.200
UCF209-28	1-3/4	5-3/8	4-1/8	2.200
UCF210-30	1-7/8	5-5/8	4-3/8	2.500
UCF210-31	1-15/16	5-5/8	4-3/8	2.500
UCF211-32	2	6-3/8	5-1/8	3.400
UCF211-34	2-1/8	6-3/8	5-1/8	3.400
UCF211-35	2-3/16	6-3/8	5-1/8	3.400
UCF212-36	2-1/4	6-7/8	5-5/8	4.200
UCF212-38	2-3/8	6-7/8	5-5/8	4.200
UCF212-39	2-7/16	6-7/8	5-5/8	4.200
UCF213-40	2-1/2	7-3/8	5-7/8	5.200
UCF214-44	2-3/4	7-5/8	6	5.900
UCF215-48	3	7-7/8	6-1/4	6.400
UCF216-50	3-1/8	8-3/16	6-1/2	7.300
UCF217-52	3-1/4	8-11/16	6-7/8	8.900
UCF218-56	3-1/2	9-1/4	7-3/8	11.400

Square Flange Units

BU

Bearing No.	Shaft Dia in inch	Dimensions in inch		Wt. (Kg)
		a	e	
UCF305-14	7/8	4-5/16	3-5/32	1.200
UCF305-16	1	4-5/16	3-5/32	1.200
UCF306-18	1-1/8	4-15/16	3-47/64	1.560
UCF307-20	1-1/4	5-5/16	3-15/16	2.100
UCF307-22	1-3/8	5-5/16	3-15/16	2.100
UCF308-24	1-1/2	5-7/8	4-13/32	2.900
UCF309-26	1-5/8	6-5/16	4-59/64	3.600
UCF309-28	1-3/4	6-5/16	4-59/64	3.600
UCF310-30	1-7/8	6-7/8	5-13/64	4.700
UCF311-32	2	7-5/16	5-33/64	5.700
UCF311-34	2-1/8	7-5/16	5-33/64	5.700
UCF312-36	2-1/4	7-11/16	5-29/32	6.800
UCF312-38	2-3/8	7-11/16	5-29/32	6.800
UCF313-40	2-1/2	8-3/16	6-17/32	7.800
UCF314-44	2-3/4	8-7/8	7-1/64	9.600
UCF315-48	3	9-5/16	7-1/4	11.700
UCF316-50	3-1/8	9-11/16	7-23/32	13.700
UCF317-52	3-1/4	10-1/4	8-1/32	15.200
UCF318-56	3-1/2	11	8-1/2	18.800
UCF319-60	3-3/4	11-7/16	8-31/32	20.700
UCF320-64	4	12-3/16	9-17/32	24.800

KG


Series : **UCFC200****253**


Bearing No.	Dimensions in inch					Wt. (Kg)
	d	a	p	e	B	
UCFC201-8	3/4	3-15/16	3-5/64	2-11/64	1.220	0.720
UCFC202-9	9/16	3-15/16	3-5/64	2-11/64	1.220	0.720
UCFC202-10	5/8	3-15/16	3-5/64	2-11/64	1.220	0.720
UCFC203-11	11/16	3-15/16	3-5/64	2-11/64	1.220	0.700
UCFC204-12	3/4	3-15/16	3-5/64	2-11/64	1.220	0.690
UCFC205-13	13/16	4-17/32	3-35/64	2-1/2	1.342	1.040
UCFC205-14	7/8	4-17/32	3-35/64	2-1/2	1.342	1.030
UCFC205-15	15/16	4-17/32	3-35/64	2-1/2	1.342	1.010
UCFC205-16	1	4-17/32	3-35/64	2-1/2	1.342	1.000
UCFC206-17	1-1/16	4-59/64	3-15/16	2-25/32	1.500	1.310
UCFC206-18	1-1/8	4-59/64	3-15/16	2-25/32	1.500	1.320
UCFC206-19	1-3/16	4-59/64	3-15/16	2-25/32	1.500	1.300
UCFC206-20	1-1/4	4-59/64	3-15/16	2-25/32	1.500	1.290
UCFC207-20	1-1/4	5-5/16	4-21/64	3-1/16	1.689	1.870
UCFC207-21	1-5/16	5-5/16	4-21/64	3-1/16	1.689	1.840
UCFC207-22	1-3/8	5-5/16	4-21/64	3-1/16	1.689	1.810
UCFC207-23	1-7/16	5-5/16	4-21/64	3-1/16	1.689	1.780
UCFC208-24	1-1/2	5-45/64	4-23/32	3-11/32	1.937	2.180
UCFC208-25	1-9/16	5-45/64	4-23/32	3-11/32	1.937	2.150
UCFC209-26	1-5/8	6-19/64	5-13/64	3-43/64	1.937	2.780
UCFC209-27	1-1/16	6-19/64	5-13/64	3-43/64	1.937	2.740
UCFC209-28	1-3/4	6-19/64	5-13/64	3-43/64	1.937	2.700
UCFC210-29	1-13/16	6-1/2	5-7/16	3-27/32	2.031	3.020
UCFC210-30	1-7/8	6-1/2	5-7/16	3-27/32	2.031	2.970
UCFC210-31	1-15/16	6-1/2	5-7/16	3-27/32	2.031	2.920
UCFC210-32	2	6-1/2	5-7/16	3-27/32	2.031	2.880
UCFC211-32	2	7-9/32	5-29/32	4-3/16	2.189	4.160
UCFC211-33	2-1/16	7-9/32	5-29/32	4-3/16	2.189	4.100
UCFC211-34	2-1/8	7-9/32	5-29/32	4-3/16	2.189	4.050
UCFC211-35	2-3/16	7-9/32	5-29/32	4-3/16	2.189	3.990
UCFC212-36	2-1/4	7-11/16	6-19/64	4-29/64	2.563	5.070
UCFC212-37	2-5/16	7-11/16	6-19/64	4-29/64	2.563	4.990

Flange Cartridge Units

BU

Bearing No.	Dimensions in inch					Wt. (Kg)
	d	a	p	e	B	
UCFC212-38	2-3/8	7-11/16	6-19/64	4-29/64	2.563	4.920
UCFC212-39	2-7/16	7-11/16	6-19/64	4-29/64	2.563	4.850
UCFC213-40	2-1/2	8-5/64	6-11/16	4-47/64	2.563	5.740
UCFC213-41	2-9/16	8-5/64	6-11/16	4-47/64	2.563	5.650
UCFC214-42	2-5/8	8-15/32	6-31/32	4-59/64	2.937	7.160
UCFC214-43	2-11/16	8-15/32	6-31/32	4-59/64	2.937	7.060
UCFC214-44	2-3/4	8-15/32	6-31/32	4-59/64	2.937	6.960
UCFC215-45	2-13/16	8-21/32	7-1/4	5-1/8	3.063	7.810
UCFC215-46	2-7/8	8-21/32	7-1/4	5-1/8	3.063	7.700
UCFC215-47	2-15/16	8-21/32	7-1/4	5-1/8	3.063	7.590
UCFC215-48	3	8-21/32	7-1/4	5-1/8	3.063	7.470
UCFC216-49	3-1/16	9-29/64	7-7/8	5-9/16	3.252	9.280
UCFC216-50	3-1/8	9-29/64	7-7/8	5-9/16	3.252	9.200
UCFC216-51	3-3/8	9-29/64	7-7/8	5-9/16	3.252	9.070
UCFC217-52	3-1/4	9-27/32	8-3/16	5-51/64	3.374	11.030
UCFC217-53	3-5/16	9-27/32	8-3/16	5-51/64	3.374	10.890
UCFC217-54	3-7/16	9-27/32	8-3/16	5-51/64	3.374	10.600
UCFC218-56	3-1/2	10-7/16	8-21/32	6-1/8	3.779	13.070

KG


Series : **UCFL200****255**


Bearing No.	Shaft Dia in inch	Dimensions in inch			Wt. (Kg)
		b	a	e	
UCFL201-8	1/2	4-7/16	3-35/64	2-3/8	0.480
UCFL202-9	9/16	4-7/16	3-35/64	2-3/8	0.480
UCFL202-10	5/8	4-7/16	3-35/64	2-3/8	0.480
UCFL203-11	11/16	4-7/16	3-35/64	2-3/8	0.480
UCFL204-12	3/4	4-7/16	3-35/64	2-3/8	0.480
UCFL205-14	7/8	5-1/8	3-57/64	2-11/16	0.640
UCFL205-15	15/16	5-1/8	3-57/64	2-11/16	0.640
UCFL205-16	1	5-1/8	3-57/64	2-11/16	0.640
UCFL206-17	1-1/16	5-13/16	4-39/64	3-1/8	0.930
UCFL206-18	1-1/8	5-13/16	4-39/64	3-1/8	0.930
UCFL206-19	1-3/16	5-13/16	4-39/64	3-1/8	0.930
UCFL207-20	1-1/4	6-5/16	5-1/8	3-9/16	1.200
UCFL207-21	1-5/16	6-5/16	5-1/8	3-9/16	1.200
UCFL207-22	1-3/8	6-5/16	5-1/8	3-9/16	1.200
UCFL207-23	1-7/16	6-5/16	5-1/8	3-9/16	1.200
UCFL208-24	1-1/2	6-7/8	5-43/64	3-15/16	1.600
UCFL208-25	1-9/16	6-7/8	5-43/64	3-15/16	1.600
UCFL209-26	1-5/8	7-3/8	5-53/64	4-1/4	1.900
UCFL209-27	1-11/16	7-3/8	5-53/64	4-1/4	1.900
UCFL209-28	1-3/4	7-3/8	5-53/64	4-1/4	1.900
UCFL210-30	1-7/8	7-3/4	6-3/16	4-1/2	2.200
UCFL210-31	1-15/16	7-3/4	6-3/16	4-1/2	2.200
UCFL211-32	2	8-13/16	7-1/4	5-1/8	3.300
UCFL211-34	2-1/8	8-13/16	7-1/4	5-1/8	3.300
UCFL211-35	2-3/16	8-13/16	7-1/4	5-1/8	3.300
UCFL212-36	2-1/4	9-13/16	7-61/64	5-1/2	4.200
UCFL212-38	2-3/8	9-13/16	7-61/64	5-1/2	4.200
UCFL212-39	2-7/16	9-13/16	7-61/64	5-1/2	4.200
UCFL213-40	2-1/2	10-13/16	8-17/64	6-1/8	5.100
UCFL214-44	2-3/4	10-7/16	8-1/2	6-5/16	5.700
UCFL215-48	3	10-13/16	8-55/64	6-1/2	6.400
UCFL216-50	3-1/8	11-7/16	9-11/64	7-1/16	7.800

Oval Flange Units

BU

Bearing No.	Shaft Dia in inch	Dimensions in inch			Wt. (Kg)
		b	a	e	
UCFL305-14	7/8	5-7/8	4-29/64	3-1/8	1.100
UCFL305-16	1	5-7/8	4-29/64	3-1/8	1.100
UCFL306-18	1-1/8	7-1/16	5-9/32	3-9/16	1.500
UCFL307-20	1-1/4	7-5/16	5-35/64	3-15/16	1.800
UCFL307-22	1-3/8	7-5/16	5-35/64	3-15/16	1.800
UCFL308-24	1-1/2	7-7/8	6-7/32	4-7/16	2.400
UCFL309-26	1-5/8	9-1/16	6-31/32	4-15/16	3.400
UCFL309-28	1-3/4	9-1/16	6-31/32	4-15/16	3.400
UCFL310-30	1-7/8	9-7/16	7-23/64	5-1/2	4.300
UCFL311-32	2	9-13/16	7-51/64	5-7/8	5.100
UCFL311-34	2-1/8	9-13/16	7-51/64	5-7/8	5.100
UCFL312-36	2-1/4	10-5/8	8-11/32	6-5/16	6.200
UCFL312-38	2-3/8	10-5/8	8-11/32	6-5/16	6.200
UCFL313-40	2-1/2	11-5/8	9-29/64	6-7/8	7.400
UCFL314-44	2-3/4	12-3/8	9-27/32	7-5/16	9.000
UCFL315-48	3	12-5/8	10-15/64	7-11/16	10.000
UCFL316-50	3-1/8	14	11-3/16	8-1/4	12.600
UCFL317-52	3-1/4	14-9/16	11-13/16	8-11/16	14.500
UCFL318-56	3-1/2	15-3/16	12-13/32	9-1/4	17.100
UCFL319-60	3-3/4	15-15/16	12-63/64	9-13/16	21.800
UCFL320-64	4	17-5/16	14-11/64	10-5/8	26.500

KG



Series : **UCT200**

257

Bearing No.	Shaft Dia in inch	Dimensions in inch			Wt. (Kg)
		a	w	h	
UCT203-11	11/16	3-1/2	3-11/16	2-13/32	0.790
UCT204-12	3/4	3-1/2	3-11/16	2-13/32	0.790
UCT205-14	7/8	3-1/2	3-11/16	2-7/16	0.840
UCT205-15	15/16	3-1/2	3-11/16	2-7/16	0.840
UCT205-16	1	3-1/2	3-11/16	2-7/16	0.840
UCT206-17	1-1/16	4	4-7/16	2-3/4	1.300
UCT206-18	1-1/8	4	4-7/16	2-3/4	1.300
UCT206-19	1-3/16	4	4-7/16	2-3/4	1.300
UCT207-20	1-1/4	4	5-1/16	3-1/16	1.600
UCT207-21	1-5/16	4	5-1/16	3-1/16	1.600
UCT207-22	1-3/8	4	5-1/16	3-1/16	1.600
UCT207-23	1-7/16	4	5-1/16	3-1/16	1.600
UCT208-24	1-1/2	4-1/2	5-11/16	3-15/32	2.500
UCT208-25	1-9/16	4-1/2	5-11/16	3-15/32	2.500
UCT209-26	1-5/8	4-5/8	5-11/16	3-7/16	2.400
UCT209-27	1-11/16	4-5/8	5-11/16	3-7/16	2.400
UCT209-28	1-3/4	4-5/8	5-11/16	3-7/16	2.400
UCT210-30	1-7/8	4-5/8	5-7/8	3-17/32	2.600
UCT210-31	1-15/16	4-5/8	5-7/8	3-17/32	2.600
UCT211-32	2	5-3/4	6-3/4	4-3/16	4.000
UCT211-34	2-1/8	5-3/4	6-3/4	4-3/16	4.000
UCT211-35	2-3/16	5-3/4	6-3/4	4-3/16	4.000
UCT212-36	2-1/4	5-3/4	7-5/8	4-11/16	4.900
UCT212-38	2-3/8	5-3/4	7-5/8	4-11/16	4.900
UCT212-39	2-7/16	5-3/4	7-5/8	4-11/16	4.900
UCT213-40	2-1/2	6-9/16	8-13/16	5-13/32	6.900
UCT214-44	2-3/4	6-9/16	8-13/16	5-13/32	7.000
UCT215-48	3	6-9/16	9-1/8	5-1/2	7.300
UCT216-50	3-1/8	7-1/4	9-1/4	5-1/2	8.200
UCT217-52	3-1/4	7-13/16	10-1/4	6-3/8	11.000

Take-up Units

BU

Bearing No.	Shaft Dia in inch	Dimensions in inch			Wt. (Kg)
		a	w	h	
UCT305-14	7/8	3-1/2	4-13/16	3	1.400
UCT305-16	1	3-1/2	4-13/16	3	1.400
UCT306-18	1-1/8	3-15/16	5-3/8	3-11/32	1.800
UCT307-20	1-1/4	4-3/8	5-7/8	3-11/16	2.400
UCT307-22	1-3/8	4-3/8	5-7/8	3-11/16	2.400
UCT308-24	1-1/2	4-7/8	6-3/8	3-15/16	3.000
UCT309-26	1-5/8	5-7/16	7	4-11/32	4.100
UCT309-28	1-3/4	5-7/16	7	4-11/32	4.100
UCT310-30	1-7/8	5-15/16	7-1/2	4-19/32	5.200
UCT311-32	2	6-7/16	8-1/8	5	6.400
UCT311-34	2-1/8	6-7/16	8-1/8	5	6.400
UCT312-36	2-1/4	7	8-11/16	5-5/16	7.600
UCT312-38	2-3/8	7	8-11/16	5-5/16	7.600
UCT313-40	2-1/2	7-1/2	9-3/8	5-3/4	9.200
UCT314-44	2-3/4	7-15/16	9-15/16	6-3/32	11.200
UCT315-48	3	8-1/2	10-5/16	6-5/16	13.000
UCT316-50	3-1/8	9-1/16	11-1/8	6-27/32	15.600
UCT317-52	3-1/4	9-7/16	11-3/4	7-7/32	19.300
UCT318-56	3-1/2	10-1/16	12-5/16	7-9/16	21.200
UCT319-60	3-3/4	10-5/8	12-11/16	7-3/4	24.400
UCT320-64	4	11-7/16	13-9/16	8-9/32	30.600

KG