
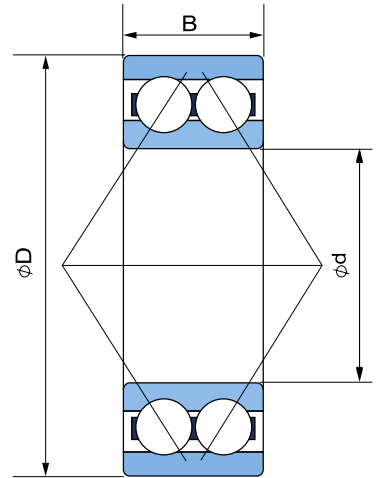


Bearing No.	Dimensions in mm			Basic Load Ratings		RPM*	Wt. (Kg)
	d	D	B	N			
				Dynamic	Static		
3200	10.000	30.000	14.300	7560	5850	17100	0.051
3201	12.000	32.000	15.900	7605	6030	15300	0.060
3202	15.000	35.000	15.900	9990	8145	13500	0.069
3203	17.000	40.000	17.500	12780	10620	11700	0.099
3204	20.000	47.000	20.600	15750	13680	10800	0.166
3205	25.000	52.000	20.600	17370	16560	8820	0.183
3206	30.000	62.000	23.800	24930	24660	7560	0.303
3207	35.000	72.000	27.000	33750	34200	6660	0.458
3208	40.000	80.000	30.200	36450	40500	5940	0.627
3209	45.000	85.000	30.200	41850	46800	5310	0.678
3210	50.000	90.000	30.200	47250	54000	4770	0.698
3211	55.000	100.000	33.300	59400	68850	4410	1.070
3212	60.000	110.000	36.500	63450	79200	4050	1.340
3213	65.000	120.000	38.100	70200	89100	3780	1.680
3214	70.000	125.000	39.700	77400	99000	3510	1.840
3215	75.000	130.000	41.300	84600	109800	3240	2.010
3216	80.000	140.000	44.400	93600	117900	3060	2.710
3217	85.000	150.000	49.200	108900	139500	2880	3.480
3218	90.000	160.000	52.400	121500	153000	2700	4.240
3219	95.000	170.000	55.600	129600	165600	2520	5.100
3220	100.000	180.000	60.300	170100	210600	2430	5.880

KG®

***Note:**

- Mentioned speed ratings are with oil lubrication. For grease lubrication, please use 75% of the indicated values.

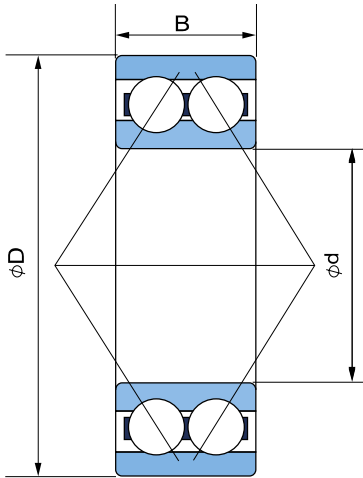


***Note:**
 • Mentioned speed ratings are with oil lubrication.
 For grease lubrication, please use 75% of the indicated values.

Double Row Series : 33


Bearing No.	Dimensions in mm			Basic Load Ratings		RPM*	Wt. (Kg)
				N			
	d	D	B	Dynamic	Static		
3300	10.000	32.000	19.000	7800	3200	10000	0.058
3301	12.000	37.000	19.000	9000	5100	12000	0.063
3302	15.000	42.000	19.000	12780	10620	11700	0.127
3303	17.000	47.000	22.200	15750	13500	10800	0.185
3304	20.000	52.000	22.200	18990	16740	9900	0.221
3305	25.000	62.000	25.400	26460	24120	8010	0.354
3306	30.000	72.000	30.200	35100	32850	6840	0.558
3307	35.000	80.000	34.900	44550	42750	5940	0.756
3308	40.000	90.000	36.500	49050	51750	5310	1.030
3309	45.000	100.000	39.700	60750	65250	4770	1.370
3310	50.000	110.000	44.400	73350	80550	4320	1.980
3311	55.000	120.000	49.200	86850	97200	3960	2.420
3312	60.000	130.000	54.000	101700	115200	3600	3.070
3313	65.000	140.000	58.700	117900	135000	3330	3.900
3314	70.000	150.000	63.500	137700	151200	3150	5.200
3315	75.000	160.000	68.300	154980	171900	2880	6.300
3316	80.000	170.000	68.300	163800	140400	3240	6.800
3317	85.000	180.000	73.000	175500	158480	3060	8.300
3318	90.000	190.000	73.000	175500	162000	2880	9.250
3319	95.000	200.000	77.800	202500	194400	2700	11.000
3320	100.000	215.000	82.600	229500	229500	2520	13.500

Bearing No.	Dimensions in mm			Basic Load Ratings		RPM*	Wt. (Kg)
	d	D	B	N			
				Dynamic	Static		
5200	10.000	30.000	14.300	6255	3420	17100	0.049
5201	12.000	52.000	15.900	8235	4545	15300	0.057
5202	15.000	35.000	15.900	9000	5445	13500	0.064
5203	17.000	40.000	17.500	11520	7110	11700	0.096
5204	20.000	47.000	20.600	17100	10890	10800	0.153
5205	25.000	52.000	20.600	18540	12870	8820	0.175
5206	30.000	62.000	23.800	25740	18360	7560	0.286
5207	35.000	72.000	27.000	34200	25020	6660	0.436
5208	40.000	80.000	30.200	38250	29250	5940	0.590
5209	45.000	85.000	30.200	43200	33300	5310	0.640
5210	50.000	90.000	30.200	45900	37800	4770	0.689
5211	55.000	100.000	33.300	56700	47700	4410	0.986
5212	60.000	110.000	36.500	64350	52650	4050	1.270
5213	65.000	120.000	38.100	75150	65250	3780	1.570
5214	70.000	125.000	39.700	81450	71550	3510	1.800
5215	75.000	130.000	41.300	81000	72450	3240	1.900
5216	80.000	140.000	44.400	95400	85950	3060	2.390
5217	85.000	150.000	49.200	100800	95400	2880	3.060
5218	90.000	160.000	54.400	126000	116100	2700	3.730
5219	95.000	170.000	55.600	143100	133200	2520	4.860
5220	100.000	180.000	60.300	160200	150300	2430	5.940

KG®

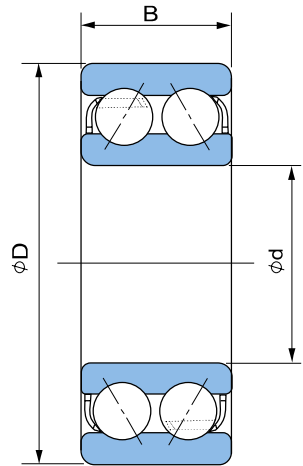***Note:**

- Mentioned speed ratings are with oil lubrication. For grease lubrication, please use 75% of the indicated values.

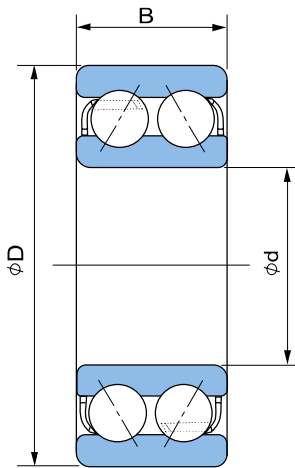

Double Row Series : 53

105

Bearing No.	Dimensions in mm			Basic Load Ratings		RPM*	Wt. (Kg)
				N			
	d	D	B	Dynamic	Static		
5303	17.000	47.000	22.200	18360	10890	10800	0.181
5304	20.000	52.000	22.200	18540	11430	9900	0.217
5305	25.000	62.000	25.400	27450	18450	8010	0.362
5306	30.000	72.000	30.200	35550	24750	6840	0.553
5307	35.000	80.000	34.900	44550	31500	5940	0.766
5308	40.000	90.000	36.500	54450	39600	5310	1.010
5309	45.000	100.000	39.700	65250	48600	4770	1.340
5310	50.000	110.000	44.400	76950	58050	4320	1.810
5311	55.000	120.000	49.200	95400	73800	3960	2.320
5312	60.000	130.000	54.000	109800	85950	3600	3.050
5313	65.000	140.000	58.700	124200	98100	3330	3.960
5314	70.000	150.000	63.500	139500	112500	3150	4.740
5315	75.000	160.000	68.300	151200	126900	2880	5.650
5316	80.000	170.000	68.300	172800	150300	3600	6.810

***Note:**

- Mentioned speed ratings are with oil lubrication. For grease lubrication, please use 75% of the indicated values.